

BEST AVAILABLE COPY

15/16.04/0507H



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 10 JUN 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03101641.3

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 03101641.3  
Demande no:

Anmeldetag:  
Date of filing: 05.06.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Frequency multiplexed architecture

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04B7/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

## Frequency multiplexed architecture

The invention relates to a receiver arranged to simultaneously receive at least a first radio frequency signal having a first frequency band and a second radio frequency signal having a second frequency band that is at least partly overlapping the first frequency band.

5 The invention also relates to a transmitter, to a transceiver, to a method of receiving and to a method of simultaneously transmitting.

The present invention can be used in telecommunication systems such as Multiple Input Multiple Output or MIMO systems, where a transmitter comprises a first number of parallel transmitting branches arranged to simultaneously and parallelly transmit data, and where the receiver comprises a second number of parallel receiving branches  
10 arranged to simultaneously and parallelly receive data. The first number of transmitting branches can be equal to, or differ from, the second number of receiving branches. By using these parallel branches, enhancement of data rate and/or channel capacity can be achieved. MIMO systems are used in for example cellular radio systems such as GSM or UMTS, wireless radio systems such as DECT and in wireless networks such as LANs, WANs or  
15 PANs.

A prior art telecommunication system is known from US 6,314,147 which discloses a receiver comprising several parallel (analogue) receiving branches that are  
20 coupled to inputs of a digital receiver.

It is an object of the present invention to provide an improved receiver for use in for example MIMO systems. To this end, the receiver is arranged to simultaneously  
25 receive at least a first radio frequency signal having a first frequency band and a second radio frequency signal having a second frequency band that is at least partly overlapping the first frequency band, the receiver comprising:

- frequency down-converting means for frequency down-converting the at least first and second radio frequency signals to at least a first and a second lower frequency

signal;

- multiplexing means for sequentially multiplexing the at least first and second lower frequency signals into a frequency multiplexed signal;

5 The invention is based upon the insight that noise sources can introduce correlated noise into the parallel receiving branches that is added to the received signals. For example, when the invention is realized in silicon and/or the receiving branches share a common synthesizer for processing the received signals, or when there is a common noise source somewhere on the silicon. Correlated noise can lower the data rate and/or the channel capacity of the receiver. The invention is further based upon the insight that by frequency  
10 multiplexing the received at least first and second radio frequency signals into a single frequency multiplexed signal, noise sources no longer can introduce correlated noise into the received signals, because, due to the sequential frequency multiplexing the frequency bands of the first and second lower frequency signals are separated in frequency. That is, each signal comprised in the frequency multiplexed signal is affected with different –uncorrelated  
15 - spectral components of the noise source.

In an embodiment according to the present invention, the receiver further comprises an analogue to digital converter for digitizing the frequency multiplexed signal. By multiplexing the information contained in the received radio frequency signals into a single frequency multiplexed signal, only a single analogue to digital converter (ADC) is required to  
20 digitize the received signals in contrast to, a single ADC per received signal.

In an embodiment according to the present invention, the receiver further comprises demultiplexing means for demultiplexing the digitized frequency multiplexed signal into at least a first and a second signal which is advantageous in that it enables a convenient processing of the digitized information.

25 In another embodiment according to the present invention a transmitter is arranged to simultaneously transmit at least a first radio frequency signal having a first frequency band and a second radio frequency signal having a second frequency band that is at least partly overlapping the first frequency band, the transmitter comprising:

- signal multiplexing means for sequentially multiplexing at least a first and a  
30 second signal into a frequency multiplexed signal;

- demultiplexing means for demultiplexing the frequency multiplexed signal into at least a first and a second lower frequency signal; and

- frequency up-converting means for frequency up-converting the first lower frequency signal into the first radio frequency signal and for frequency up-converting the

second lower frequency signal into the second radio frequency signal. This embodiment has the advantage that by sequentially multiplexing the first and second signals into a single frequency multiplexed signal, noise sources can no longer introduce correlated noise into signals.

5 In an embodiment according to the present invention, the multiplexing means comprises a digital to analogue converter (DAC) for converting the sequentially multiplexed first and second digital signals to a frequency multiplexed signal. This embodiment has the advantage that only a single DAC is required for converting the digital signals to a frequency multiplexed signal.

10 Embodiments of a transceiver according to the present invention, of a receiving method according to the present invention and a transmission method according to the present invention correspond with the embodiments of the transmitter and receiver according to the present invention.

15 These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter

Fig. 1 shows the frequency bands of two radio frequency signals according to the present invention.

20 Fig. 2 shows a frequency multiplexed signal comprising the frequency bands of two sequentially multiplexed lower frequency signals.

Fig. 3 shows a receiver according to the present invention.

Fig. 4 shows a transmitter according to the present invention.

Fig. 4a shows a multiplexer according to the present invention.

25 Fig. 4b shows a further multiplexer according to the present invention.

Fig. 5 shows a transceiver according to the present invention

Fig. 6 shows a flow chart of a method for receiving radio frequency signals according to the present invention.

30 Fig. 7 shows a flow chart of a method for transmitting radio frequency signals according to the present invention.

Fig. 1 shows the frequency bands 1 and 3 of two radio frequency signals that are having, by means example, equal bandwidths ( $f_2 - f_1$ ) that are fully overlapping i.e. they

occupy the same frequency range. As an example, single sideband signals have been assumed. Alternatively, the frequency bands 1 and 3 may also partly overlap.

Fig. 2 shows a frequency multiplexed signal comprising frequency bands 1 and 3. By means of example the frequency bands 1 and 3 are separated by means of guard band G. The frequency multiplexed signal occupies a total bandwidth B.

Fig. 3 shows a receiver 10 according to the present invention having, by means of example, two antennas 30 and 31 for receiving two radio frequency signals S1 and S2. Receiver 10 comprises mixers 32 and 33 for frequency down-converting the received radio frequency signals S1 and S3 into lower frequency signals S2 and S3. By means of multiplexer 34, signals S2 and S4 are sequentially multiplexed into frequency multiplexed signal S5. Multiplexer 34 could e.g. comprise a conventional adding element for adding the signals S2 and S4 together. Analogue to digital converter 35 is used to digitize the frequency multiplexed signal S5. Herewith, S6 comprises the digitized spectra of signals S2 and S4. In order to satisfy Shannon's law, the working speed of the analogue to digital converter 35 should be at least be twice the frequency band B of the frequency multiplexed signal S5. By means of demultiplexing unit 36, digital signals S7, S8 can be recovered so that they can be used for further processing in processing means 37. The information comprised in S7 and S8 corresponds to the information comprised in S1 and S3. Although, in contrast to S1 and S3, signals S7 and S8 are digital signals. The embodiment as shown in Fig. 3 has the advantage that noise sources cannot introduce correlated noise into the sequentially multiplexed signal S5. The embodiment has the further advantage that only a single digital to analogue converter 37 is required to digitize all received signals.

Fig. 4 shows a transmitter 20 according to the present invention. Shown are two signals S10 and S11 that have been processed by processing means 40. By means of multiplexing means 41, signals S10 and S11 are frequency multiplexed into signal S12. In principle signals S10 and S11 can be digital or analogue. In case of digital signals S10 or S11, the multiplexing means 41 can be constructed as shown in Fig. 4a, wherein the multiplexing means comprises a multiplexer 59 for sequentially multiplexing the digital signals S10 and S11 into signal S12d. By means of digital to analogue converter (53) signal S12d is subsequently converted into the analogue frequency multiplexed signal S12. In case S10 and S11 are analogue signals, the multiplexer could be constructed as shown in Fig. 4b where multipliers 54 and 55 are used to shift the frequency of signals S10 and S11. Filters 56 and 57 e.g. bandpass filters are used to remove the unwanted spectral components after multiplication. By means of adder 58, the signals S10 and S11 are added together which

results in the frequency multiplexed signal S12. Therefore, S12 comprises two signals S13, S14 that are a representation of the original signals S10 and S11. By means of demultiplexing unit 48 these two signals S13, S14 can be recovered e.g. by using bandpass filters 42 and 43. By means of multipliers 44 and 45 signals S13 and S14 are being frequency up-converted to signals S15 and S16, respectively. Signals S15 and S16 are subsequently being transmitted into the air via antennas 46 and 47. This embodiment has the advantage that a noise source cannot introduce correlated noise into the signals S10 and S11 once they are frequency multiplexed into signal S12. In addition the invention has the further advantage only a single digital to analogue converter 53 is required to convert digital signals S10 and S11 into a single frequency multiplexed signal S12.

Fig. 5, shows a transceiver 50 according to the present invention. The transceiver comprises antennas 51 and 52 for receiving and transmitting data. The transceiver comprises a receiver 10 and a transmitter 20 which are coupled to processing means (not shown here) for processing signals S7, S8 and S10 and S11.

Fig. 6 shows a flow chart of a method for receiving radio frequency signals according to the present invention. In the first step 60, the at least first and second radio frequency signals S1 and S3 are frequency down-converted into at least a first lower frequency S2 signal and a second lower frequency signal S3. In the second step 61, signals S2 and S3 are sequentially multiplexed into frequency multiplexed signal S5.

Fig. 7 shows a flow chart of a method for transmitting radio frequency signals according to the present invention. In the first step 70 the at least first and second signals S10 and S11 are sequentially multiplexed into a frequency multiplexed signal S12. Then in step 71, signal S12 is demultiplexed back into signals S13 and S14. Finally in step 72, signals S13 and S14 are frequency up-converted into the first radio frequency signal S15 and into the second radio frequency signal S16.

It is to be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. The embodiments can be realized in either the analogue or digital domain using analogue and digital components. The word "comprising" does not exclude the presence of elements or steps other than those listed in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

## CLAIMS:

1. Receiver (10) arranged to simultaneously receive at least a first (S1) radio frequency signal having a first frequency band (1) and a second radio frequency signal (S3) having a second frequency band (3) that is at least partly overlapping the first frequency band (1), the receiver comprising:
  - 5 - frequency down-conversion means (32,33) for frequency down-converting the at least first (S1) and second radio frequency signals (S3) to at least a first (S2) and a second (S4) lower frequency signal;
  - multiplexing means (34) for sequentially multiplexing the at least first (S2) and second lower frequency signals (S4) into a frequency multiplexed signal (S5).
- 10 2. Receiver (10) according to claim 1, wherein (10) the receiver further comprises an analogue to digital converter (35) for digitizing the frequency multiplexed signal (S5).
- 15 3. Receiver (10) according to claim 2, wherein the receiver (10) further comprises demultiplexing (36) means for demultiplexing the digitized frequency multiplexed signal (S6) into at least a first (S7) and a second (S8) signal.
- 20 4. Transmitter (20) arranged to simultaneously transmit at least a first radio frequency signal (S15) having a first frequency band (1) and a second radio frequency signal (S16) having a second frequency band (3) that is at least partly overlapping the first frequency band (1), the transmitter (20) comprising:
  - signal multiplexing means (41) for sequentially multiplexing at least a first (S10) and a second (S11) signal into a frequency multiplexed signal (S12);
  - 25 - demultiplexing means (48) for demultiplexing the frequency multiplexed signal (S12) into at least a first (S13) and a second (S14) lower frequency signal;
  - frequency up-converting means (44,45) for frequency up-converting the first lower frequency signal (S13) into the first radio frequency signal (S15) and for frequency up-



converting the second lower frequency signal (S14) into the second radio frequency signal (S16).

5. Transmitter (20) according to claim 4, wherein the at least first (S12) and second (S11) signals are digital signals.

6. Transmitter (20) according to claim 5, wherein the multiplexing means (41) comprises a digital to analogue converter (53) for converting the sequentially multiplexed first and second digital signals (S12d) to a frequency multiplexed signal (S12).

7. Transceiver (50) comprising a receiver (10) that is arranged to simultaneously receive at least a first radio frequency signal (S1) having a first frequency band (1) and a second radio frequency signal (S3) having a second frequency band (3) that is at least partly overlapping the first frequency band (1), the receiver (10) comprising:

- signal conversion means (32,33) for frequency down-converting the at least first (S1) and second radio frequency signals (S3) to at least a first (S2) and a second (S4) lower frequency signal;
- multiplexing means (34) for sequentially multiplexing the at least first (S2) and second lower (S4) frequency signals into a frequency multiplexed signal (S5);

8. Transceiver (50) according to claim 7, the transceiver further comprising a transmitter (20) that is arranged to simultaneously transmit at least a third radio frequency signal (S15) having a third frequency band (1) and a fourth radio frequency signal (S16) having a fourth frequency band (3) that is at least partly overlapping the third frequency band (1), the transmitter (20) comprising:

- signal multiplexing means (41) for sequentially multiplexing at least a third (S10) and a second (S11) signal into a frequency multiplexed signal (S12);
- demultiplexing means (48) for demultiplexing the frequency multiplexed signal (S12) into at least a third (S13) and a fourth (S14) lower frequency signal;
- frequency up-converting means for frequency up-converting the third lower frequency signal (S13) into the third radio frequency signal (S15) and for frequency up-converting the fourth lower frequency signal (S14) into the fourth radio frequency signal (S16).

9. Method for receiving at least a first radio frequency signal (S1) having a first frequency band (1) and a second radio frequency signal (S3) having a second frequency band (3) that is at least partly overlapping the first frequency band (1), the method comprising the steps of:

- 5 - frequency down-converting the at least first (S1) and second (S3) radio frequency signals into at least a first lower frequency signal (S2) and a second lower frequency signal (S4);
- sequentially multiplexing the at least first (S2) and second (S4) lower frequency signals into a frequency multiplexed signal (S5).

10




10. Method for transmitting at least a first radio frequency signal (S15) having a first frequency band (1) and a second radio frequency signal (S16) having a second frequency band (3) that is at least partly overlapping the first frequency band (1), the method comprising the steps of:

- 15 - sequentially multiplexing the at least first (S10) and a second signals (S11) into a frequency multiplexed signal (S12);
- demultiplexing the frequency multiplexed signal (S12) into at least a first (S13) and a second lower frequency signal (S14);
- frequency up-converting the first lower frequency signal (S13) into the first
- 20 radio frequency signal (S15) and the second lower frequency signal (S14) into the second radio frequency signal (S16).

## ABSTRACT:

A receiver (10) is arranged to simultaneously receive at least a first (S1) radio frequency signal having a first frequency band (1) and a second radio frequency signal (S3) having a second frequency band (3) that is at least partly overlapping the first frequency band (1). The receiver has frequency down-conversion means (32,33) for frequency down-  
5 converting the at least first (S1) and second radio frequency signals (S3) to at least a first (S2) and a second (S4) lower frequency signal and multiplexing means (34) for sequentially multiplexing the at least first (S2) and second lower frequency signals (S4) into a frequency multiplexed signal (S5).

10 Fig. 3

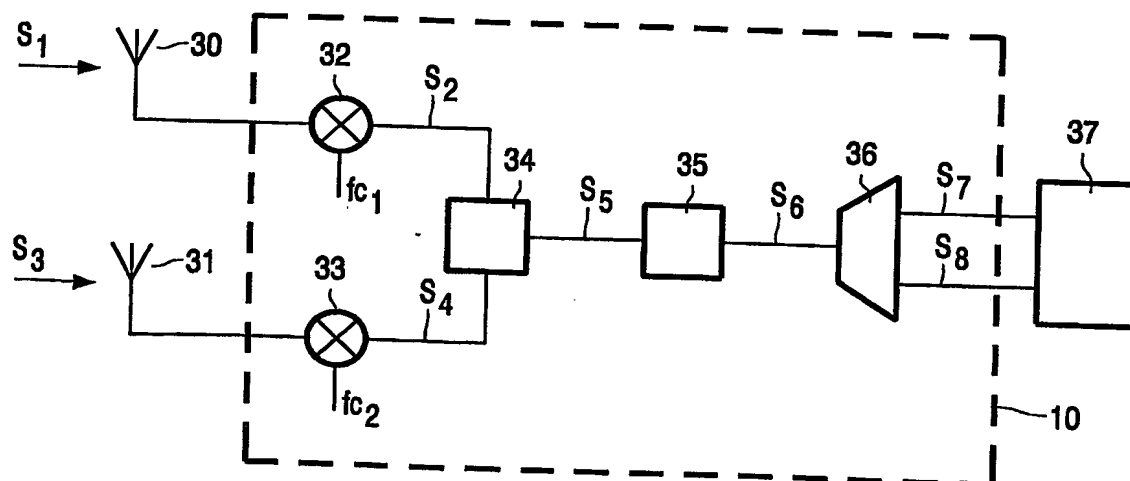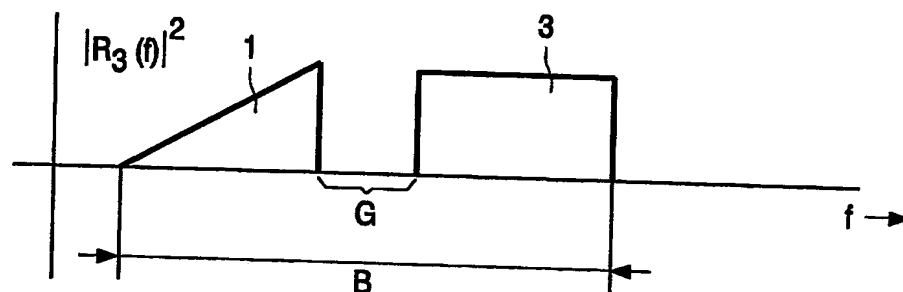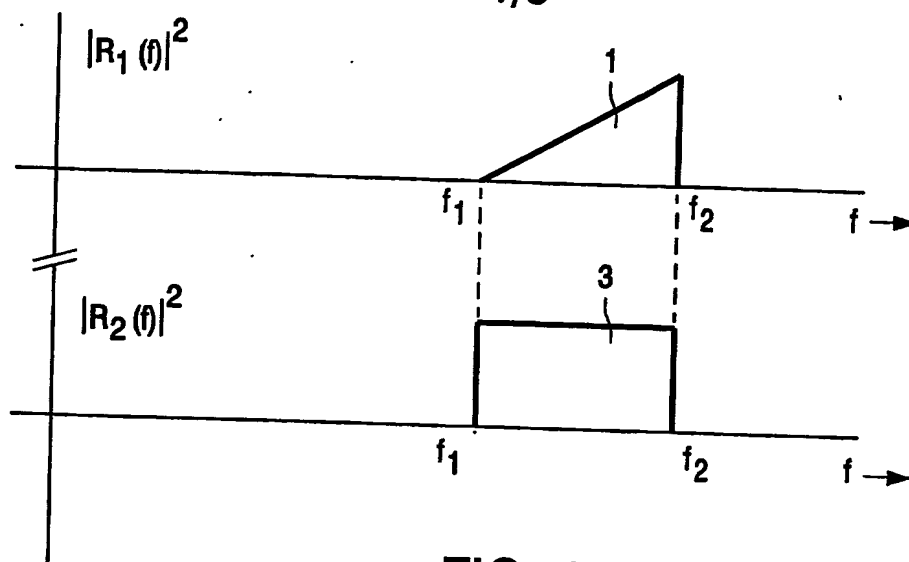

2/3

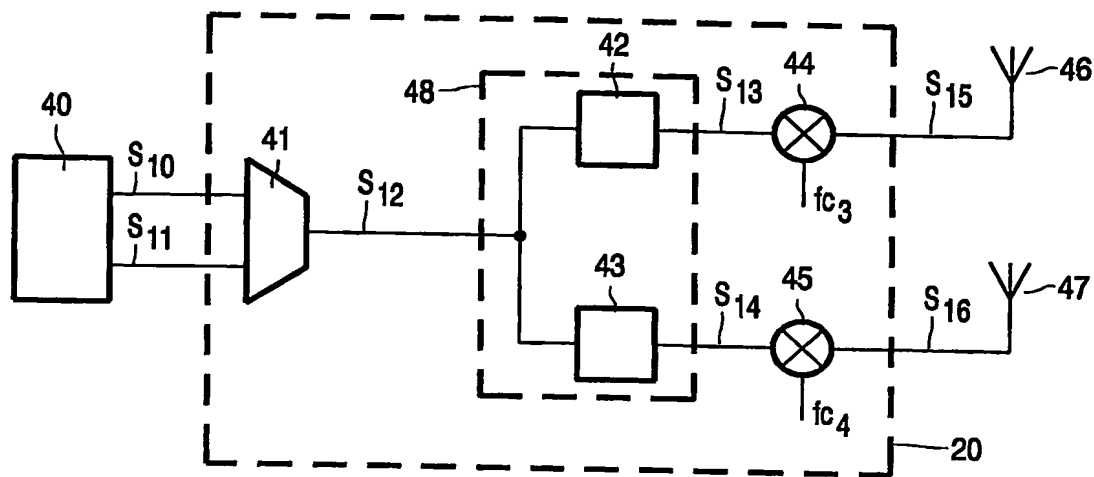


FIG. 4

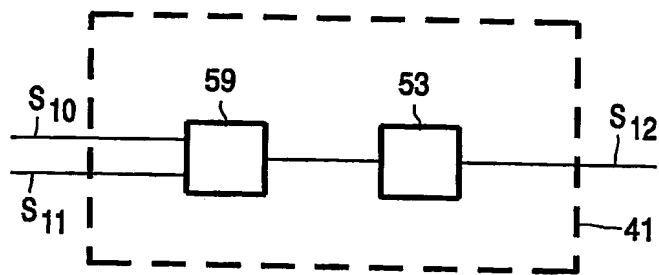


FIG. 4a

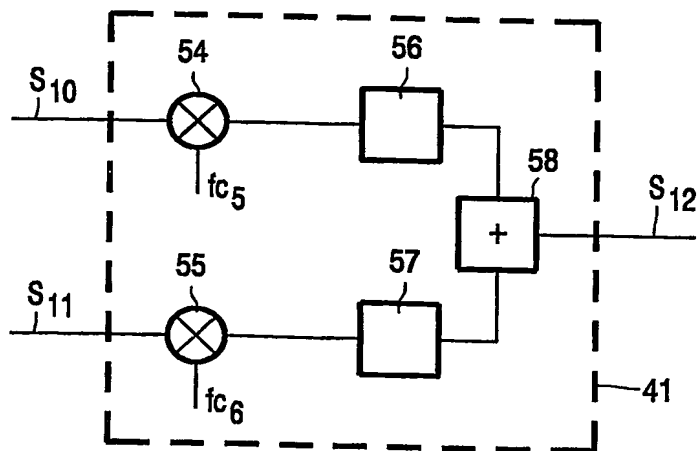


FIG. 4b

A block diagram of a system 50. Two input sources, 51 and 52, are connected to two parallel processing blocks, 10 and 20. Block 10 has two outputs, S7 and S8. Block 20 has two outputs, S10 and S11.

A block diagram showing two rectangular blocks, 60 and 61, connected by a vertical line. Block 60 is positioned above block 61, and the vertical line connects the bottom center of block 60 to the top center of block 61.

```

graph TD
    70[ ] --- 71[ ]
    71 --- 72[ ]
  
```

A block diagram showing a vertical sequence of three rectangular blocks. The top block is labeled 70, the middle block is labeled 71, and the bottom block is labeled 72. They are connected by vertical lines, indicating a sequential or hierarchical relationship.

FIG. 7

IB 04 50776



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**